

LED Work Light

CLN-A

CE

RoHS
10

UL

IP66G

IP67G

IP69K

Indoor
UseMounting in
All
DirectionsAmbient
Temperature
-40°C~+60°C

Daylight

Tilt Type

Pan/Tilt Type



Model Number Configuration


CLN-24A-CD-T

①

① Mounting
T = Tilt Type
PT = Pan/Tilt Type


Dimensions (mm)

■ Tilt only (T type)

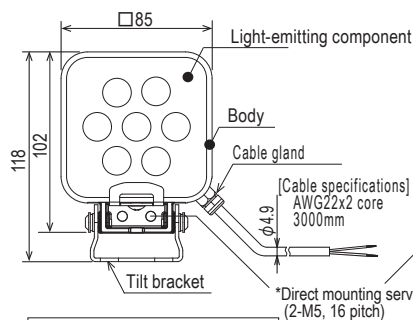


Mounting pitch (2-M6, 26 pitch)

■ Tilt only (T type)




Can tilt 180° and can be folded to 33mm for easier installation.

■ Pan/Tilt (PT type)

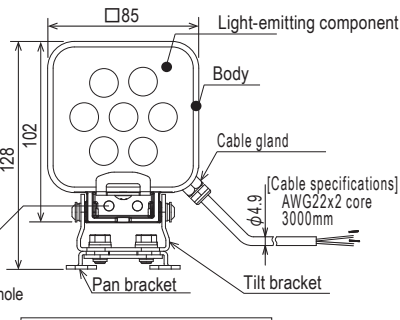


Mounting pitch (2-M6, 45 pitch)

■ Pan & Tilt (PT type)




Can tilt 180° or rotated 120° to fit any application.
Can be folded to 43mm for easier installation.

Mounting dimensions (T type)

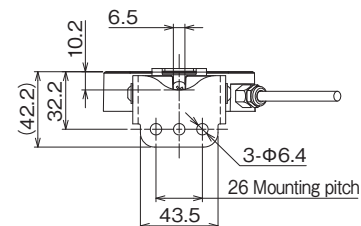

Mounting dimensions (PT type)

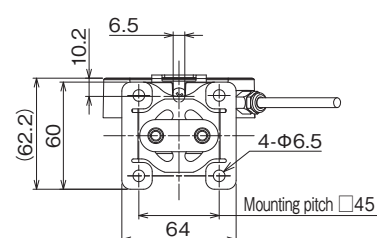

Product List

Model Number	Rated Voltage	Luminous Color	Power Consumption	Mass
CLN-24A-CD-T	24V DC	Daylight	4.2W	0.39kg
CLN-24A-CD-PT	24V DC	Daylight	4.2W	0.46kg

Specification

Description	Distance	
Illuminance (Center, typical)	At 1.0m	820lx
	At 2.0m	200lx